Data subject to change without prior notice
Edition 03/2026 © 2026 JMG Cranes S.p.A. All rights reserved
Rev. 00

EU standards CE

UNI ISO 4301-1: A1

2006/42 CE-2014/30 UE
2000/14 CE and subsequent amendments.

EN 13000:2014-ANSI/ASME B30.5-2021
and subsequent amendments.

IMQ CERTIFIED
QUALITY MANAGEMENT SYSTEM
ISO 9001:2015

JMG Cranes S.p.A.

Offices and plant: Via dell'Innovazione, 3 - 29010 Sarmato (PC) - Italy

Registered Office: Via Dante, 15 - 26100 Cremona - Italy

Administration: Via Bergamo, 142 - 26100 Cremona - Italy

+39 0523 8486

info@jmgcranes.com

www.jmgcranes.com

Electric
pick & carry
cranes

MC45SB
(imperial)

Maximum capacity
9900 lbs

MC45SB

Features

- Radio-controlled mobile crane
- Hydraulic sequential boom
- Front wheels drive with counter-rotation
- Tilting head 3 positions (0°/+40/+80°)
- 1 removable counterweight

Optional

- Hydraulic winch
- Mechanical jib with mechanical extension
- Hydraulic jib
- Hydraulic forks
- Lithium battery
- Customer paint colour



Hook

1 counterweight

Load charts

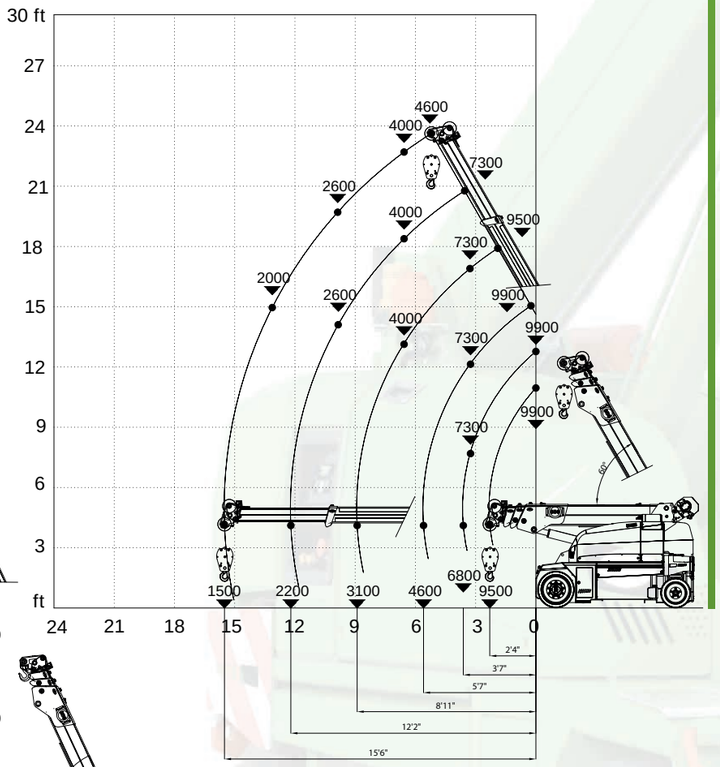

Winch

1 counterweight

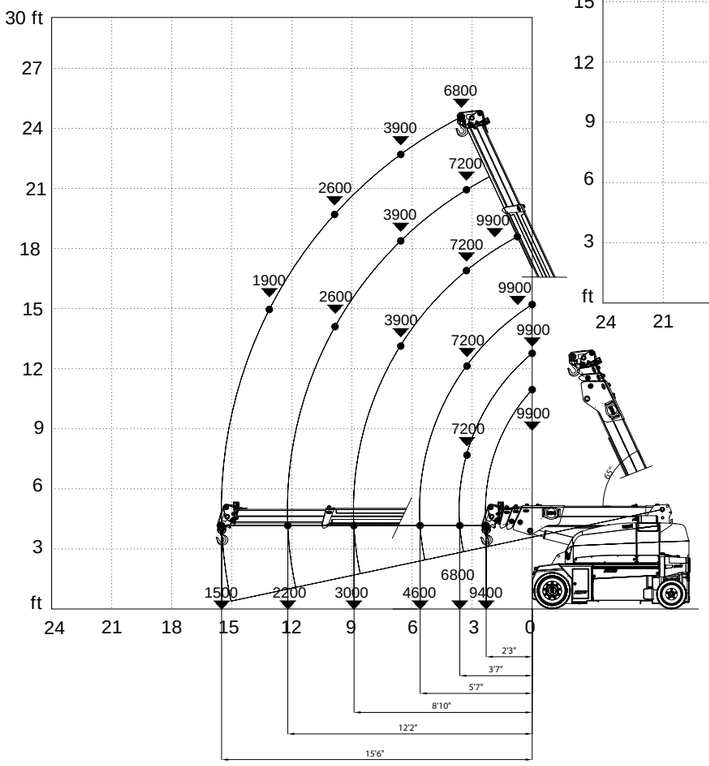

Technical features

Maximum capacity	9900 lbs
Dimensions ft	7'-10" x 3'-1" x 5'-3"

Front wheels drive nr.2 electric motors 5kW 48V AC	L.M.I. Electronic safe load indicator and tilting moment limiter
Total lbs 11900 nr.1 removable counterweight lbs 2500	Automatic braking system
Armoured plate battery 48V 560Ah	Fabricated from preformed and welded quality steel plate
nr.2 front superelastic 22x9-16” nr.2 rear superelastic 8x6-12 1/8”	Inclination angle +65°/-12°
Rear steering Steering angle -90°/+90°	Electric motor 9kW 48V AC
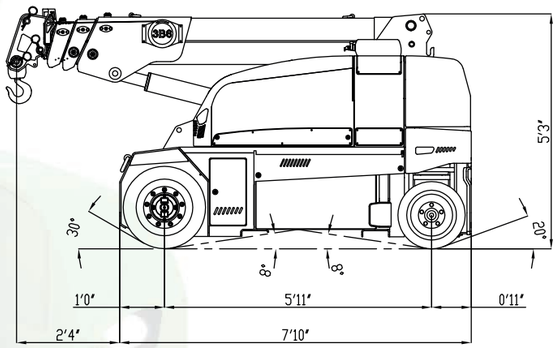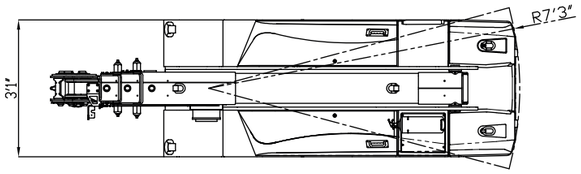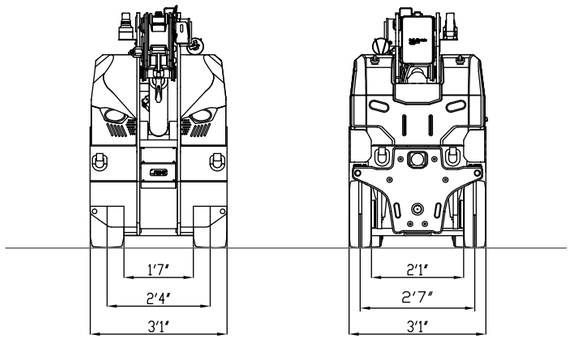
Overall dimensions