


Data subject to change without prior notice  
Edition 02/2026 © 2026 JMG Cranes S.p.A. All rights reserved  
Rev. 00



# Electric pick & carry cranes

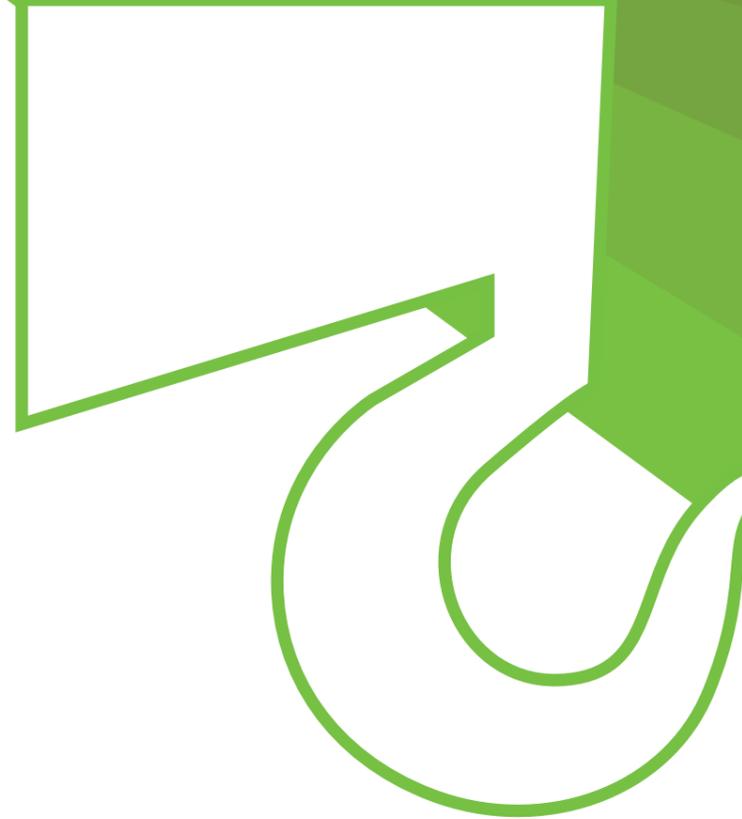

**MC45SB**  
(metric)  
Maximum capacity  
**4,5t**

## EU standards CE

UNI ISO 4301-1: A1  
2006/42 CE-2014/30 UE  
2000/14 CE and subsequent amendments.  
EN 13000:2014-ANSI/ASME B30.5-2021  
and subsequent amendments.



## JMG Cranes S.p.A.

**Offices and plant:** Via dell'Innovazione, 3 - 29010 Sarmato (PC) - Italy

**Registered Office:** Via Dante, 15 - 26100 Cremona - Italy

**Administration:** Via Bergamo, 142 - 26100 Cremona - Italy

+39 0523 8486

info@jmgcranes.com

www.jmgcranes.com





## Features


- Radio-controlled mobile crane
- Hydraulic sequential boom
- Front wheels drive with counter-rotation
- Tilting head 3 positions (0°/+40°/+80°)
- 1 removable counterweight

## Optional


- Hydraulic winch
- Mechanical jib with mechanical extension
- Hydraulic jib
- Hydraulic forks
- Lithium battery
- Customer paint colour

N. MAX ROPE (S)	
4,5 t	
SINGLE ROPE (I)	
0,8 t	

Hook  
1 counterweight

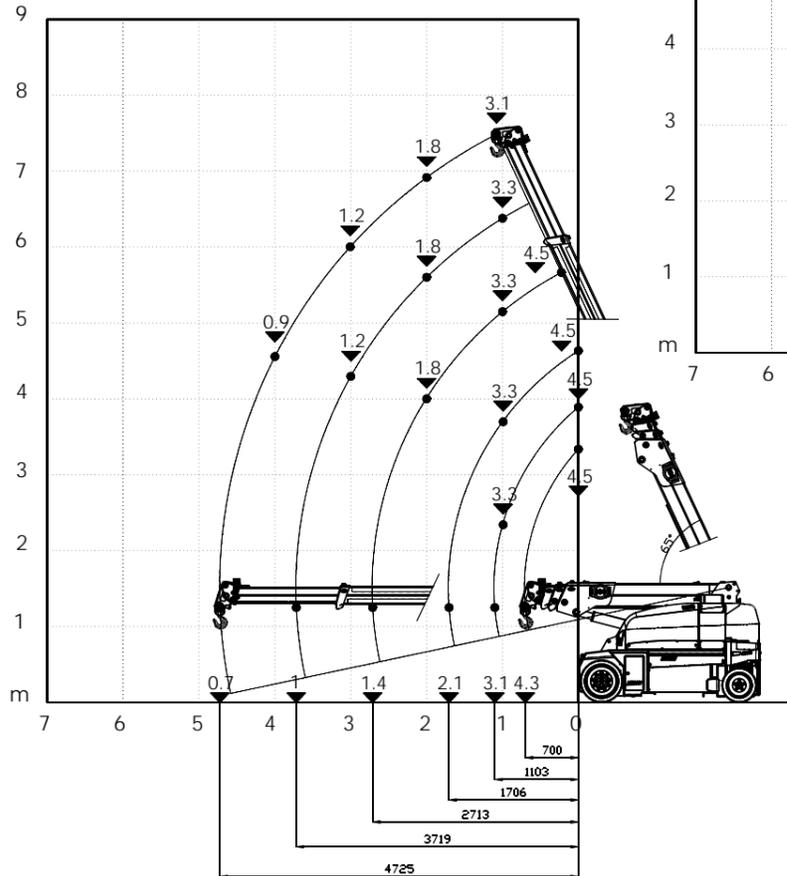

## Load charts

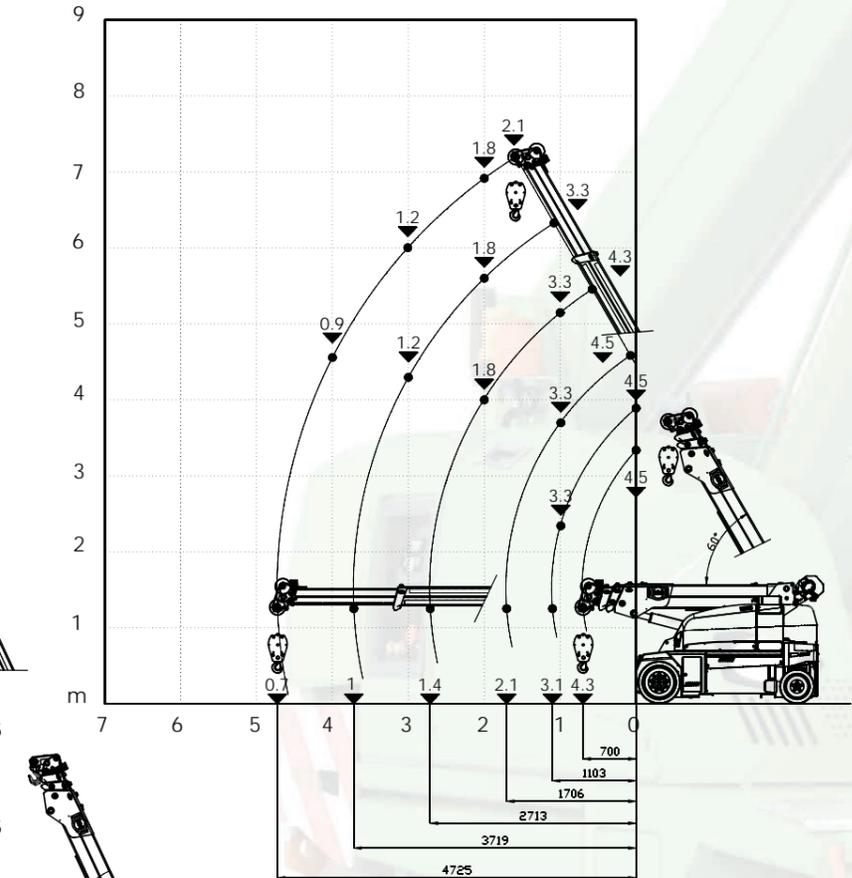

Winch  
1 counterweight



## Technical features

Maximum capacity	4,5t
Dimensions mm	2.390x930x1.595

- Front wheels drive  
nr.2 electric motors 5kW 48V AC
- Total kg 5.400  
nr.1 removable counterweight kg 1.140
- Armoured plate battery 48V 560Ah
- nr.2 front superelastic 22x9-16"  
nr.2 rear superelastic 8x6-12 1/8"
- Rear steering  
Steering angle -90°/+90°

- L.M.I. Electronic safe load indicator and tilting moment limiter
- Automatic braking system
- Fabricated from preformed and welded quality steel plate
- Inclination angle +65°/-12°
- Electric motor 9kW 48V AC

## Overall dimensions

